

M9400™

Clear / Smoke Anti-Scratch coated lens.

Clear / Smoke Anti-Scratch & Anti-Mist coated lens

TECHNICAL SPECIFICATION

EYE & FACE PROTECTION

Lightweight wraparound design with flexibility of frame providing a versatile fit onto both smaller and larger faces

INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

PERFORMANCE

Lens and frame offer protection against low energy high-speed particles at 45m/s (101mph)

The optical qualities of the lens comply with the requirements of optical class 1 (highest)

CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth


Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

DIMENSIONS OF OUTER PACKAGING

Quantity: 240

Weight: 9.1kg (Approx.)

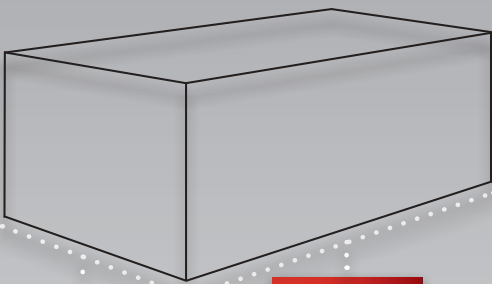

HEIGHT:
500mm

WIDTH:
330mm

LENGTH:
620mm



LENS/FRAME
Polycarbonate

CONFORMITY

Conforms to EN 166 & EN 170 / EN 172

CE 682745 issued by BSI

DIMENSIONS OF SPECTACLE

Lens Thickness: 2.4mm

Lens Size (Vertical): 44mm

Lens Size (Diagonal): 75mm

Bridge: 17mm

Temple Length (Lens to tip): 158mm

Overall Width: 146mm

Closest point between temple tips: 93mm

Weight: 24g (Approx.)

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The M9400 is not suitable for protection against dusts, liquids or molten metals

MARKINGS

PRODUCT CODE

Frame: EN166 1 FT

Clear HC Lens: 2C-1.2 ↑ 1 FT K ASA718-161-124

Smoke HC Lens: 5-2.5 ↑ 1 FT K ASA718-165-024

Clear AS/AF Lens: 2C-1.2 ↑ 1 FT ASA718-1B1-124

Smoke AS/AF Lens: 5-2.5 ↑ 1 FT ASA718-1B5-024

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050



Issued 19/07/2021